


PROGEF Standard Check valve type 562 With fusion sockets metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

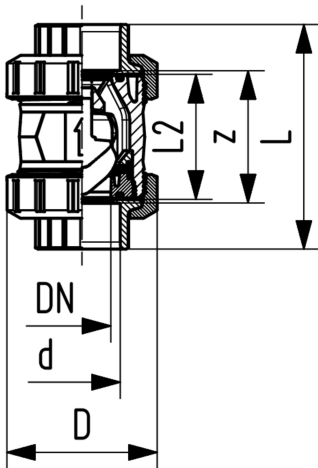

d [mm]	DN [mm]	PN [bar]	kv-val- ue ($\Delta p=1$ bar) [l/min]	EPDM Code	SP	Weight [kg]	FPM Code	SP	Weight [kg]
16	10	10	190	167 562 001	1	0.080	167 562 011	1	0.080
20	15	10	180	167 562 002	1	0.080	167 562 012	1	0.080
25	20	10	380	167 562 003	1	0.170	167 562 013	1	0.180
32	25	10	460	167 562 004	1	0.190	167 562 014	1	0.190
40	32	10	850	167 562 005	1	0.330	167 562 015	1	0.340
50	40	10	1080	167 562 006	1	0.480	167 562 016	1	0.480
63	50	10	1670	167 562 007	1	0.880	167 562 017	1	0.880
75	65	10	2950	167 562 008	1	2.300	167 562 018	1	2.310
90	80	10	3600	167 562 009	1	3.560	167 562 019	1	3.580
110	100	10	4150	167 562 010	1	5.900	167 562 020	1	5.930

d [mm]	D [mm]	L [mm]	L2 [mm]	z [mm]	closest inch [inch]
16	50	93	56	67	3/8
20	50	95	56	66	1/2
25	58	109	65	77	3/4
32	68	119	71	83	1
40	84	135	85	99	1 1/4
50	97	147	89	105	1 1/2
63	124	168	101	117	2
75	166	233	136	167	2 1/2
90	200	254	141	180	3
110	238	301	164	215	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
 Phone +41 -(0)52-631 1111
 e-mail: info.ps@georgfischer.com
 Internet: <http://www.gfps.com>