

# DOUBLE FLANGED BEND 90° series Q



## TECHNICAL CHARACTERISTICS

Flange end connections according to EN1092-2: PN10 or PN16

Designed according to EN545

Maximum working pressure: PN16 / 16 bar

Working temperature: 0°C - +70°C

Color RAL5015

Powder epoxy coating 250 µm thickness


Body from ductile iron EN-GJS-500-7

WRAS approved epoxy coating

ACS approved epoxy coating under request

DUCTILE IRON FITTINGS

DN	Flange drilling	L	e	Weight	BLUCAST ref. no.
50	PN10/16	150	7	6.1	Q050
65	PN10/16	160	7	8.5	Q065
80	PN10/16	165	7	9.7	Q080
100	PN10/16	180	7.2	11.9	Q100
150	PN10/16	220	7.8	18.3	Q150
200	PN10	260	8.4	33.6	Q200
200	PN16	260	8.4	33.6	Q200P
250	PN10	350	9	52	Q250
250	PN16	350	9	52	Q250P
300	PN10	400	9.6	72	Q300
300	PN16	400	9.6	72	Q300P
400	PN10	500	10.4	151	Q400
500	PN10	600	12	190	Q500
600	PN10	700	13.2	286	Q600

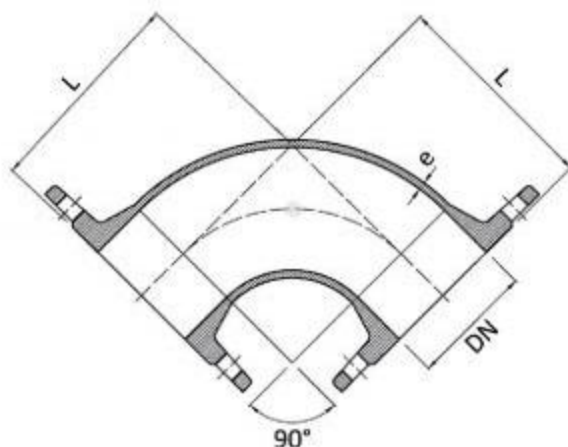

All illustrations, technical data, dimensions (in mm) and weights (all weights specified in kg) are non-binding.